

Branching


PD Dr. Timo Berthold

Private Lecturer @ TU Berlin


Director, Mixed-Integer Optimization @ FICO

Organization


- Exam dates
 - September 11
 - September 25
 - October 5
- Alter Krug, Friday 18.00

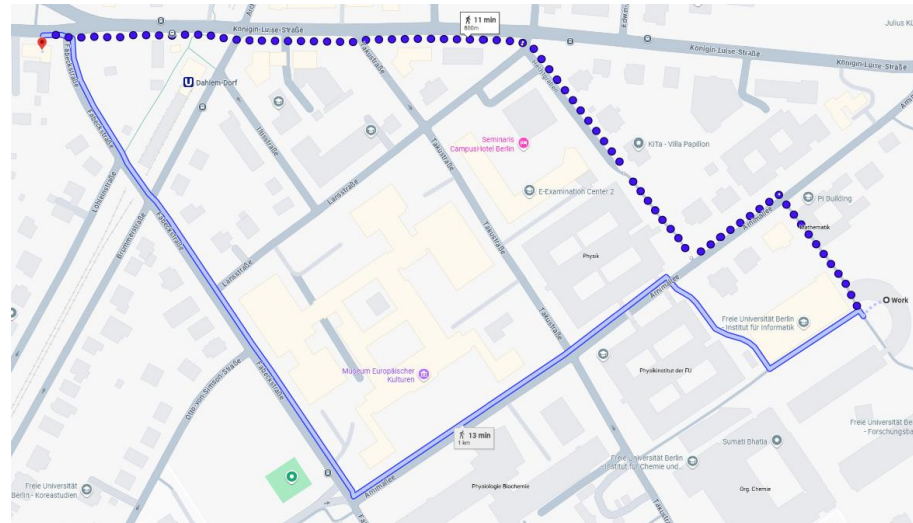

MIP Solver Flowchart

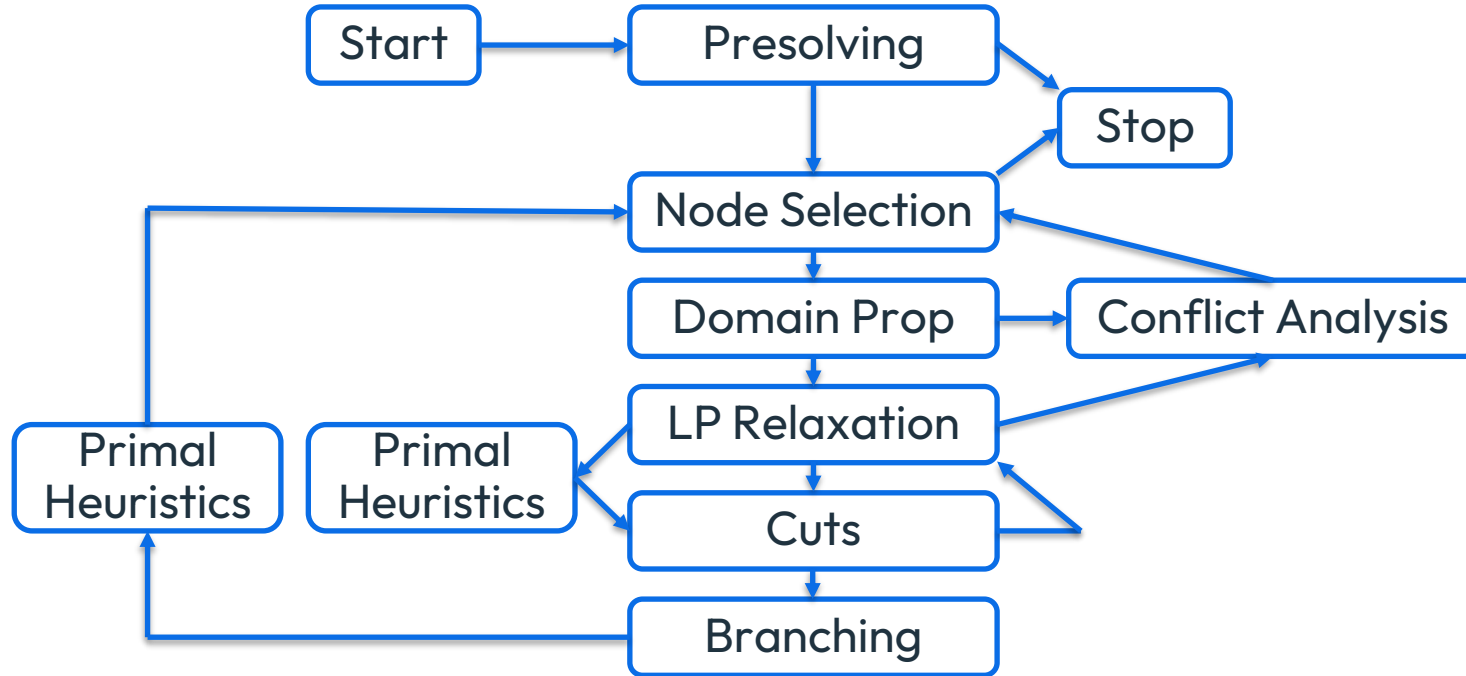

MIP Solver Flowchart

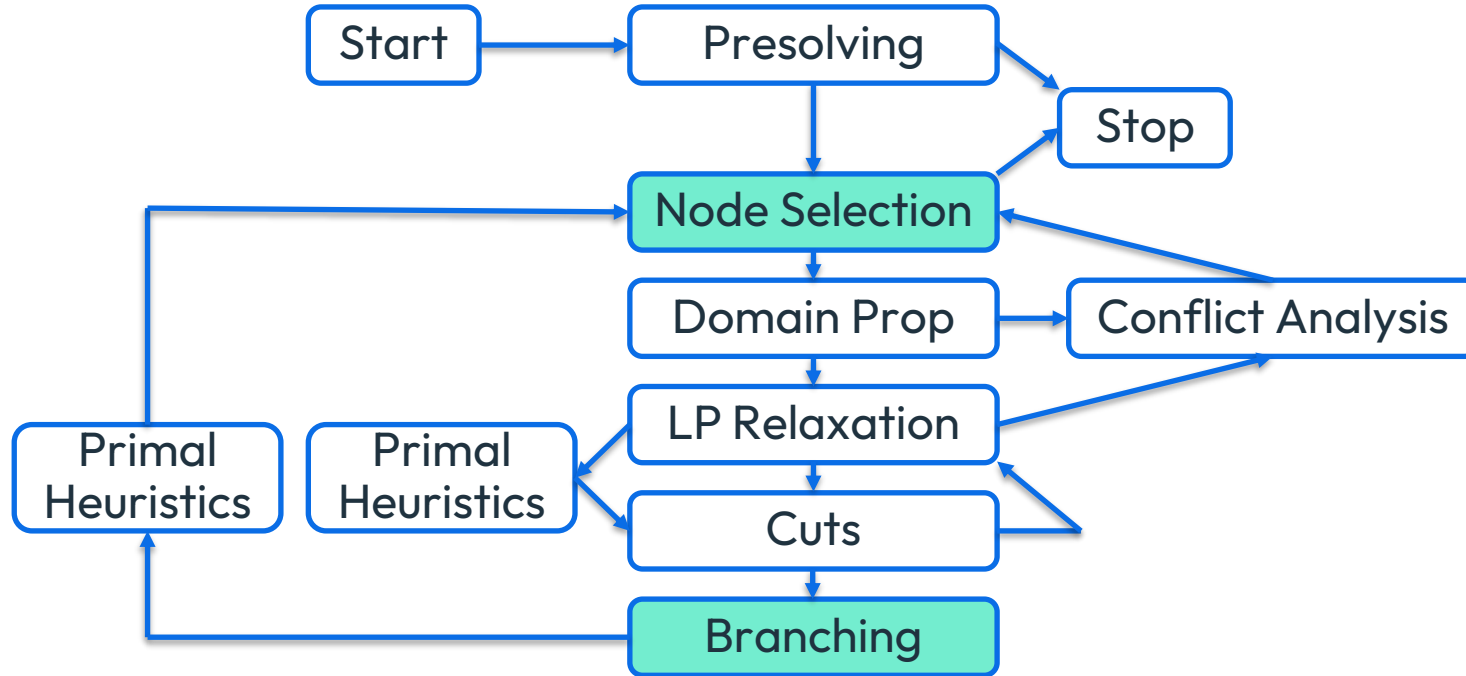

Agenda

1. Branching
2. Strong branching, pseudo-costs, reliability
3. Other history-based rules, hybrid branching
4. Node selection

Refresh: Branch&Bound

ECONOMETRICA

VOLUME 28

July, 1960

NUMBER 3


AN AUTOMATIC METHOD OF SOLVING DISCRETE PROGRAMMING PROBLEMS

BY A. H. LAND AND A. G. DOIG

In the classical linear programming problem the behaviour of continuous, nonnegative variables subject to a system of linear inequalities is investigated. One possible generalization of this problem is to relax the continuity condition on the variables. This paper presents a simple numerical algorithm for the solution of programming problems in which some or all of the variables can take only discrete values. The algorithm requires no special techniques beyond those used in ordinary linear programming, and lends itself to automatic computing. Its use is illustrated on two numerical examples.


LP-Based Branch&Bound (Colorful Picture)

1. Abort Criterion
2. Node selection
3. Solve relaxation
4. Bounding
5. Feasibility Check
6. Branching

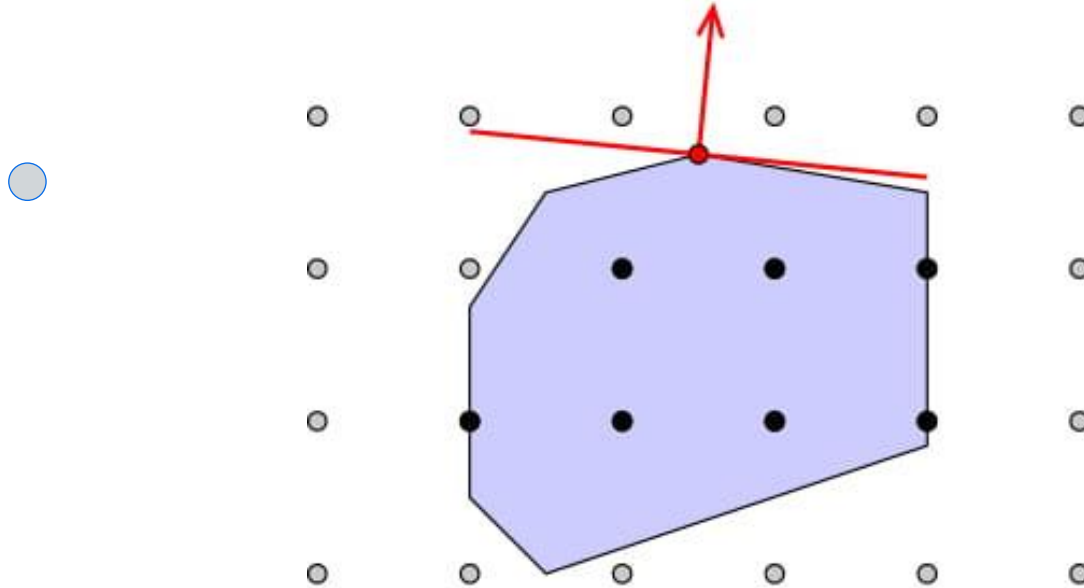


LP-Based Branch&Bound (Colorful Picture)

1. Abort Criterion
2. Node selection





3. Solve relaxation
4. Bounding

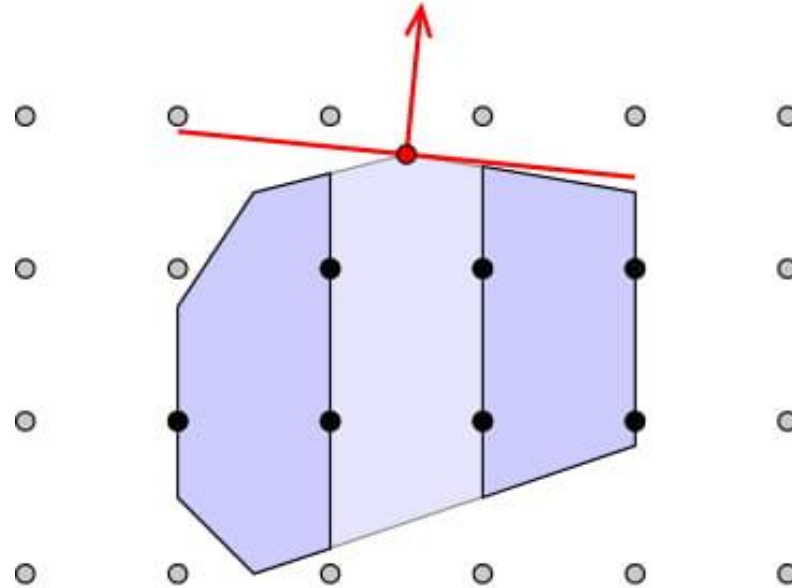

5. Feasibility Check
6. Branching


LP-Based Branch&Bound (Colorful Picture)

1. Abort Criterion
2. Node selection
3. Solve relaxation
4. Bounding
5. Feasibility Check
6. Branching

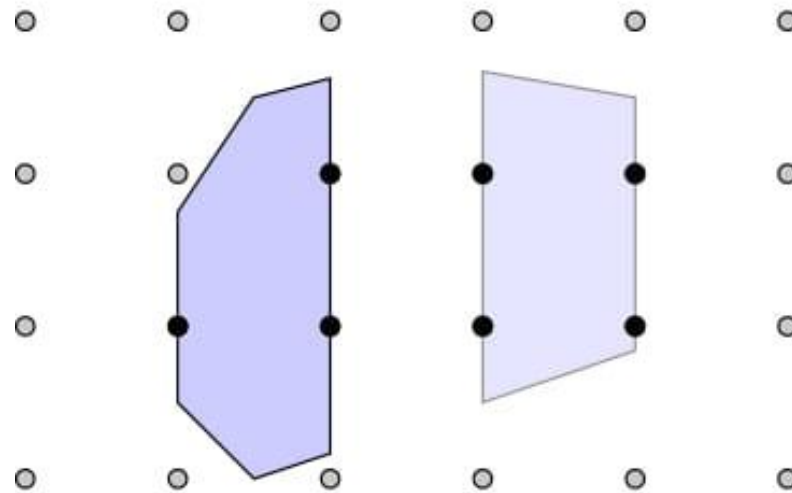


LP-Based Branch&Bound (Colorful Picture)

1. Abort Criterion
2. Node selection



3. Solve relaxation
4. Bounding

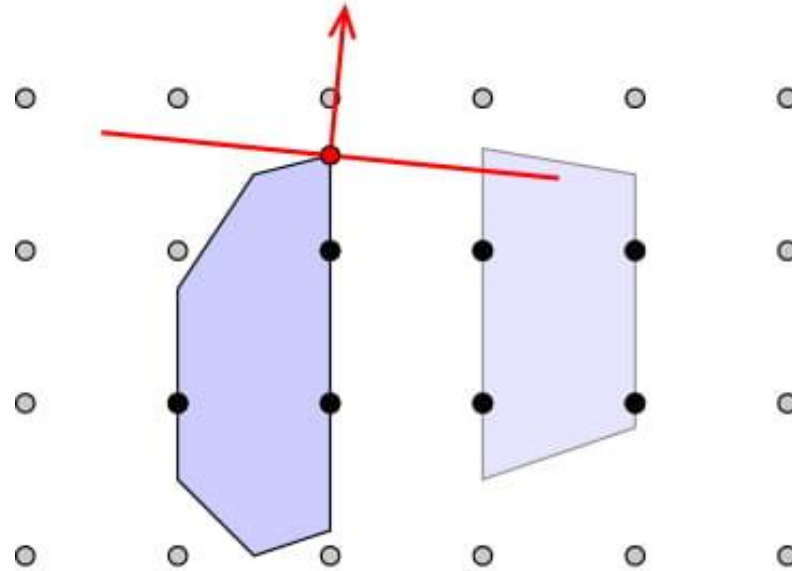



5. Feasibility Check
6. Branching

LP-Based Branch&Bound (Colorful Picture)

1. Abort Criterion
2. Node selection



3. Solve relaxation
4. Bounding

5. Feasibility Check
6. Branching

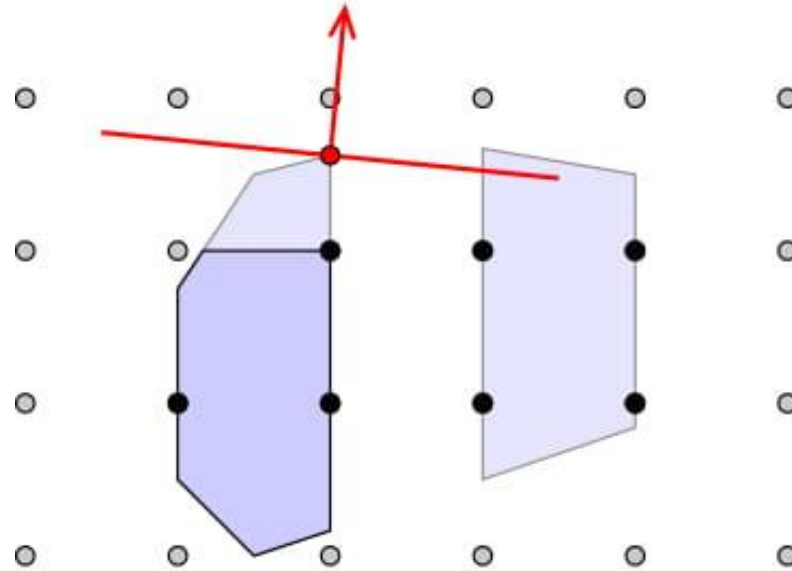

LP-Based Branch&Bound (Colorful Picture)

1. Abort Criterion
2. Node selection
3. Solve relaxation
4. Bounding
5. Feasibility Check
6. Branching

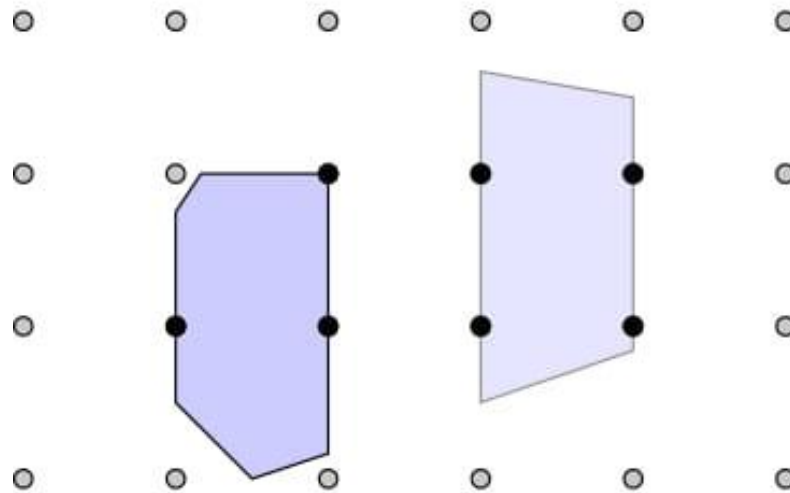



LP-Based Branch&Bound (Colorful Picture)

1. Abort Criterion
2. Node selection



3. Solve relaxation
4. Bounding

5. Feasibility Check
6. Branching

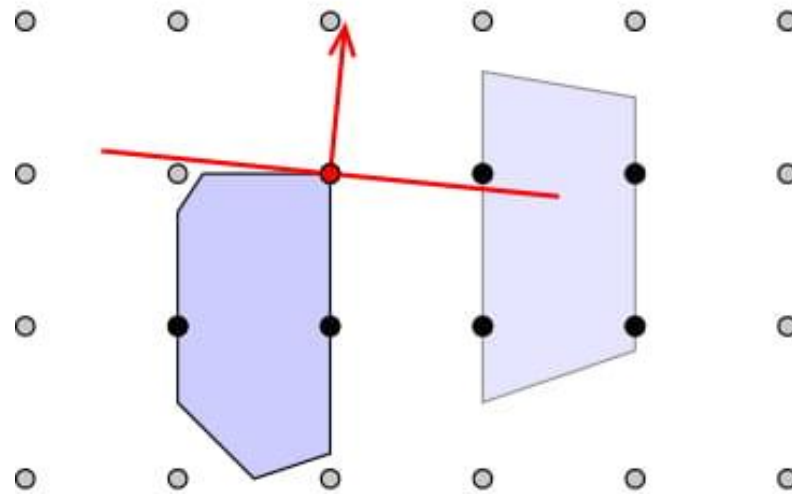



LP-Based Branch&Bound (Colorful Picture)

1. Abort Criterion
2. Node selection
3. Solve relaxation
4. Bounding
5. Feasibility Check
6. Branching

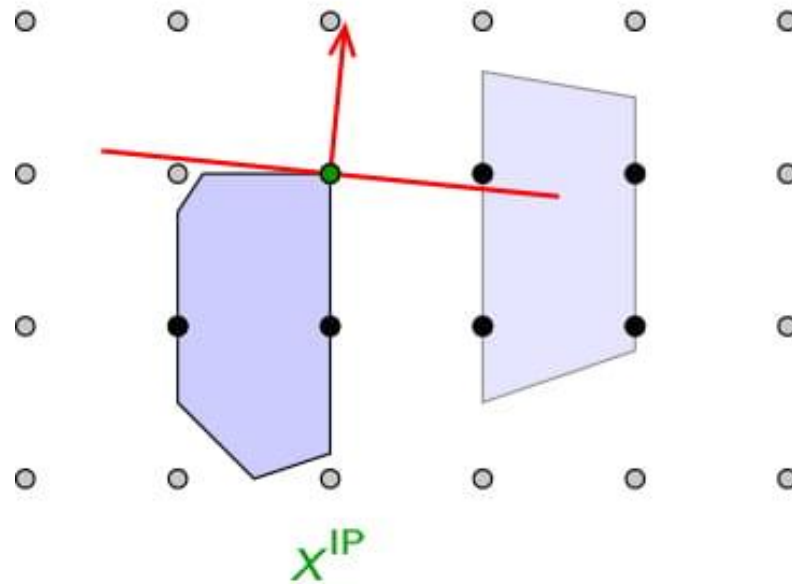



LP-Based Branch&Bound (Colorful Picture)

1. Abort Criterion
2. Node selection
3. Solve relaxation
4. Bounding
5. Feasibility Check
6. Branching

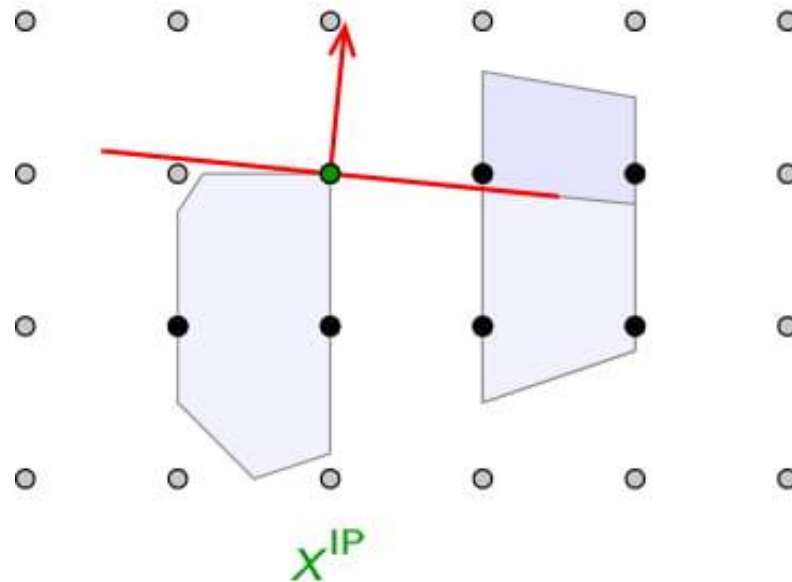



LP-Based Branch&Bound (Colorful Picture)

1. Abort Criterion
2. Node selection
3. Solve relaxation
4. Bounding
5. Feasibility Check
6. Branching

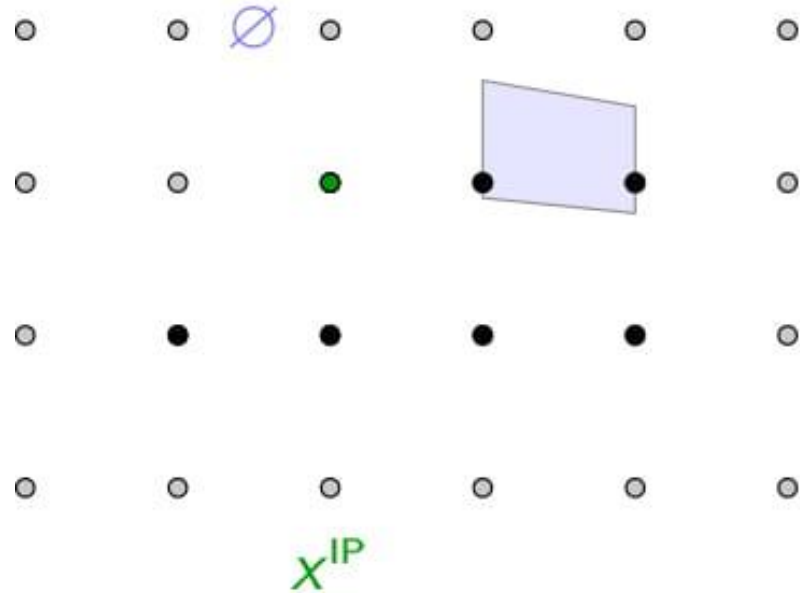



LP-Based Branch&Bound (Colorful Picture)

1. Abort Criterion
2. Node selection
3. Solve relaxation
4. Bounding
5. Feasibility Check
6. Branching

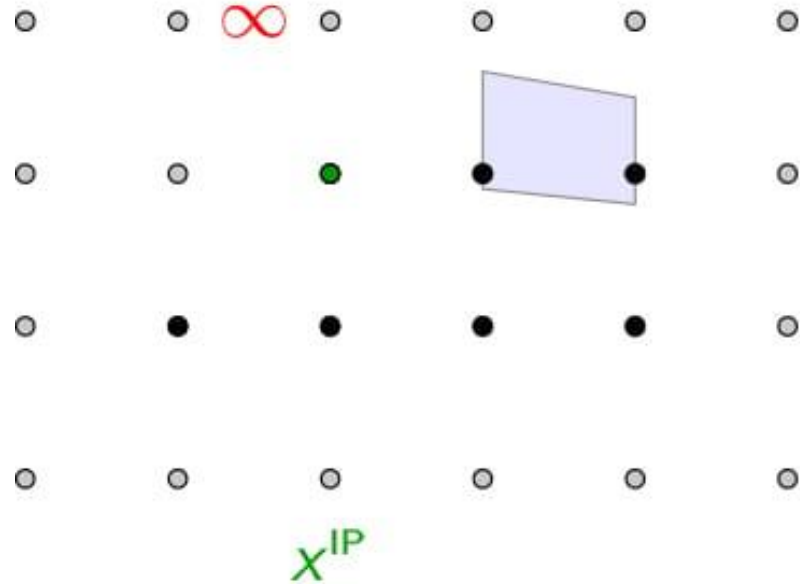



LP-Based Branch&Bound (Colorful Picture)

1. Abort Criterion
2. Node selection
3. Solve relaxation
4. Bounding
5. Feasibility Check
6. Branching

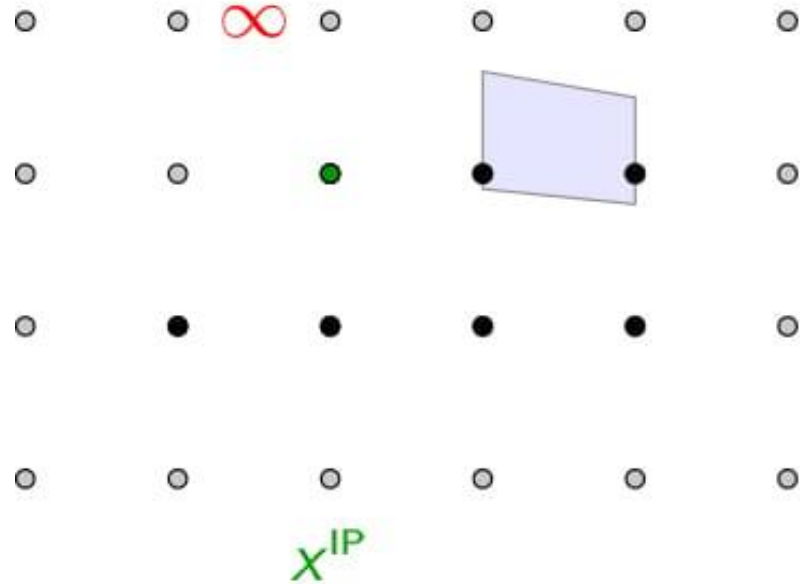

LP-Based Branch&Bound (Colorful Picture)

1. Abort Criterion
2. Node selection
3. Solve relaxation
4. Bounding
5. Feasibility Check
6. Branching

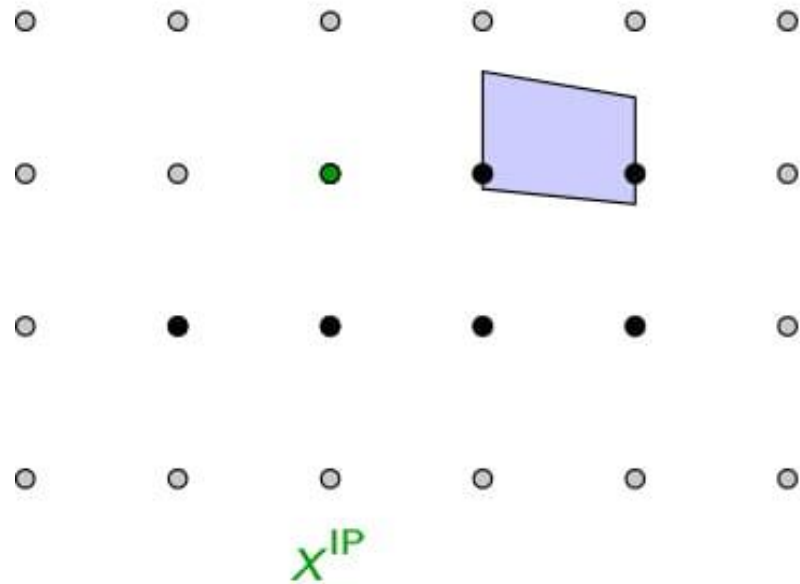

LP-Based Branch&Bound (Colorful Picture)

1. Abort Criterion



2. Node selection

3. Solve relaxation

4. Bounding

5. Feasibility Check

6. Branching

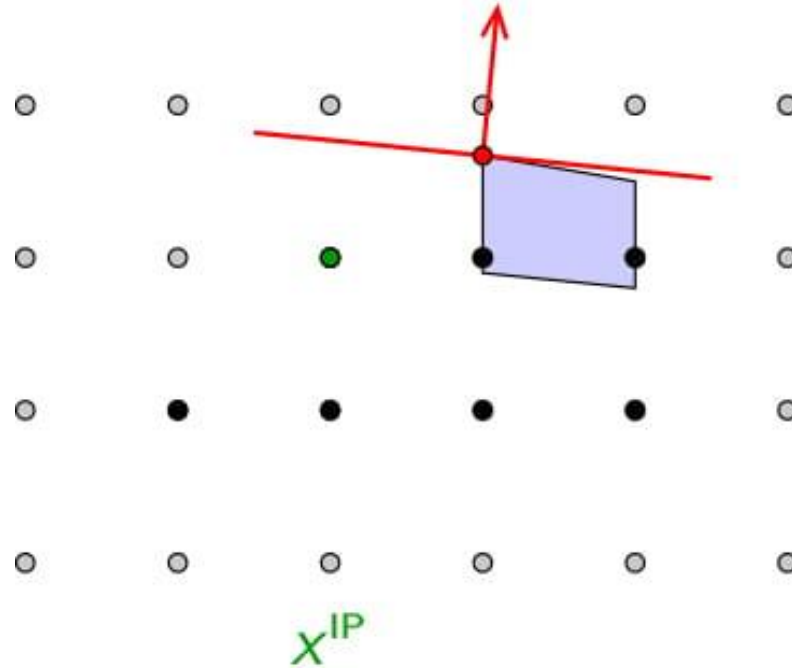



LP-Based Branch&Bound (Colorful Picture)

1. Abort Criterion
2. Node selection



3. Solve relaxation
4. Bounding

5. Feasibility Check
6. Branching

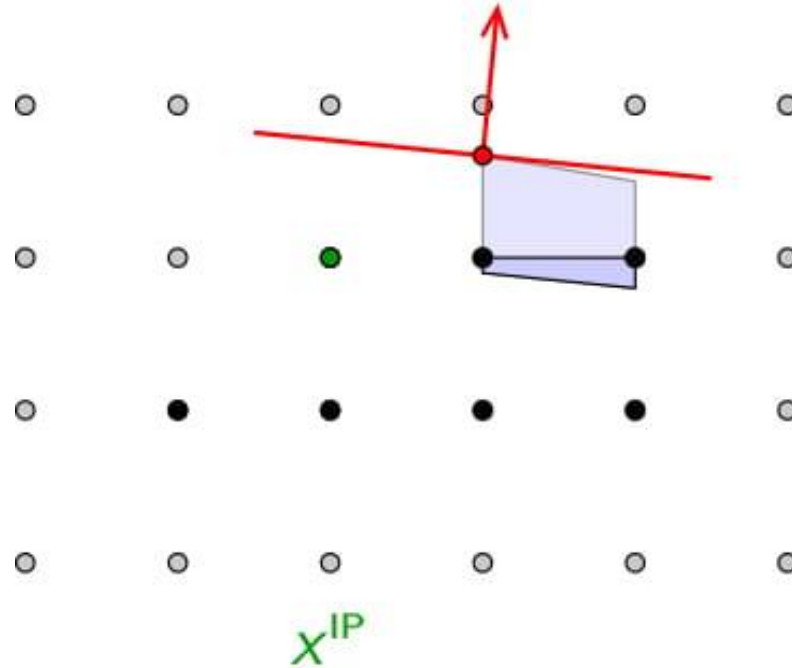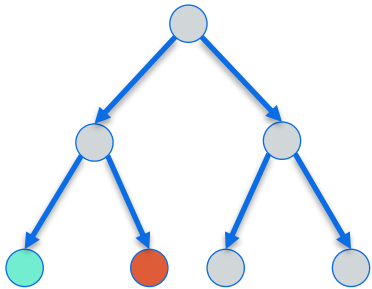



LP-Based Branch&Bound (Colorful Picture)

1. Abort Criterion
2. Node selection
3. Solve relaxation
4. Bounding
5. Feasibility Check
6. Branching

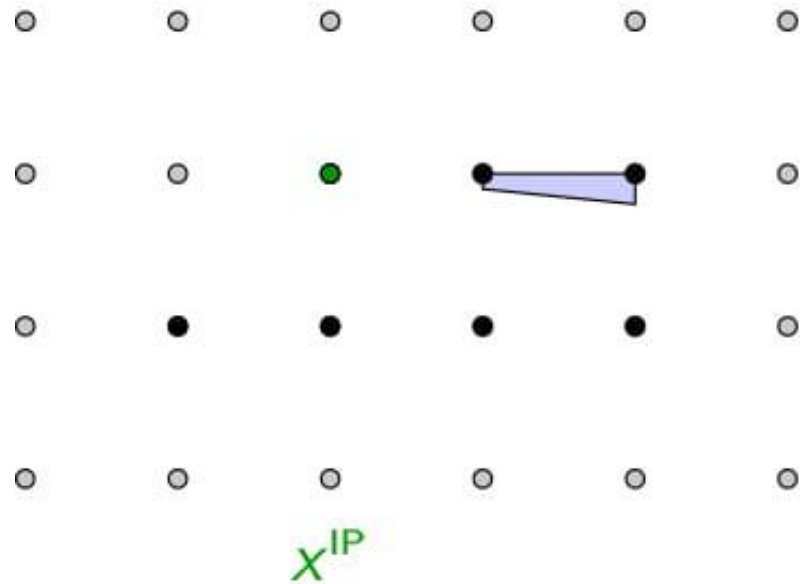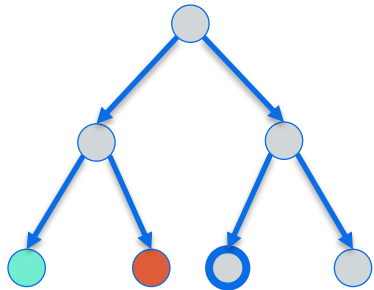



LP-Based Branch&Bound (Colorful Picture)

1. Abort Criterion
2. Node selection
3. Solve relaxation
4. Bounding
5. Feasibility Check
6. Branching

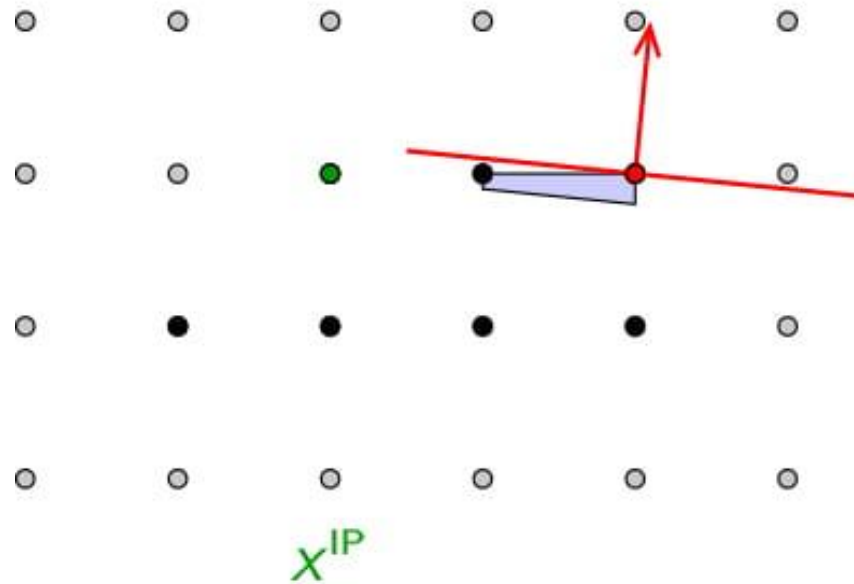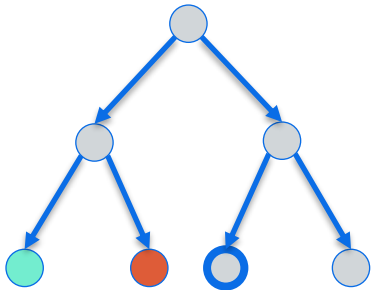

LP-Based Branch&Bound (Colorful Picture)

1. Abort Criterion
2. Node selection
3. Solve relaxation
4. Bounding
5. Feasibility Check
6. Branching

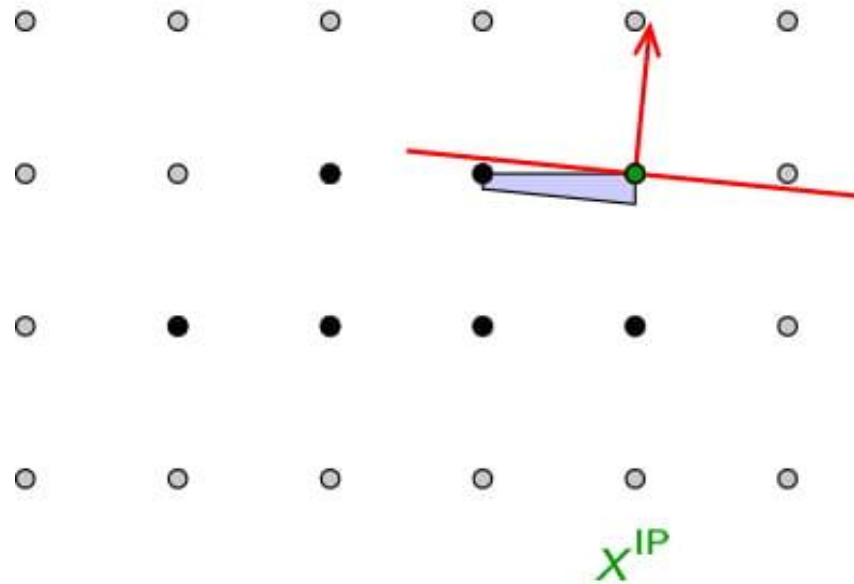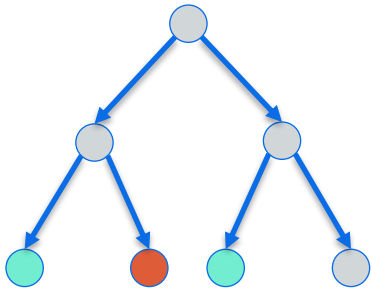

LP-Based Branch&Bound (Colorful Picture)

1. Abort Criterion



2. Node selection

3. Solve relaxation

4. Bounding

5. Feasibility Check

6. Branching

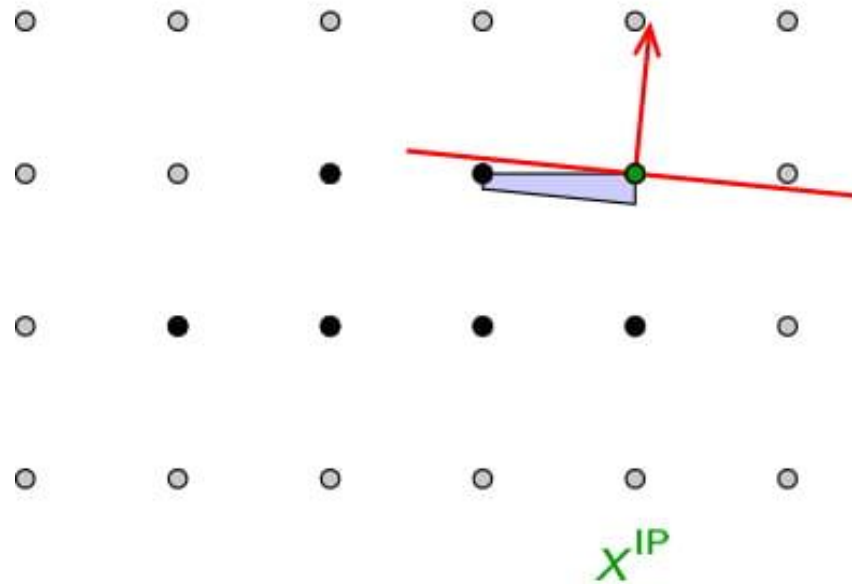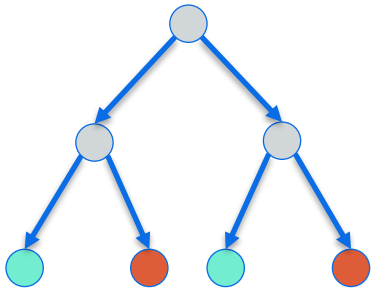

LP-Based Branch&Bound (Colorful Picture)

1. Abort Criterion
2. Node selection
3. Solve relaxation
4. Bounding
5. Feasibility Check
6. Variable selection

Two main decisions:

- Node selection
 - Might be important to find good solutions early
 - When optimum is found: just a matter of traversal order
- Variable selection
 - Main goal: Improve dual bound
 - Bad selection might duplicate search effort
 - at every level...

So, What Is a Good Branching Rule?

Eeeeasy, my textbook knows the answer!




- Branch on the most fractional variable
 - „most undecided“

All a lie...



- Most-fractional as bad as random branching
 - partially due to dual degeneracy
 - you can do orders of magnitude better

image source: DALL-E



Strong Branching and Pseudo-Costs

Strong Branching (Applegate et al 1995)

Typical goal: Improve dual bound

- Perform an explicit [look-ahead](#) by solving all possible descendants of the current node

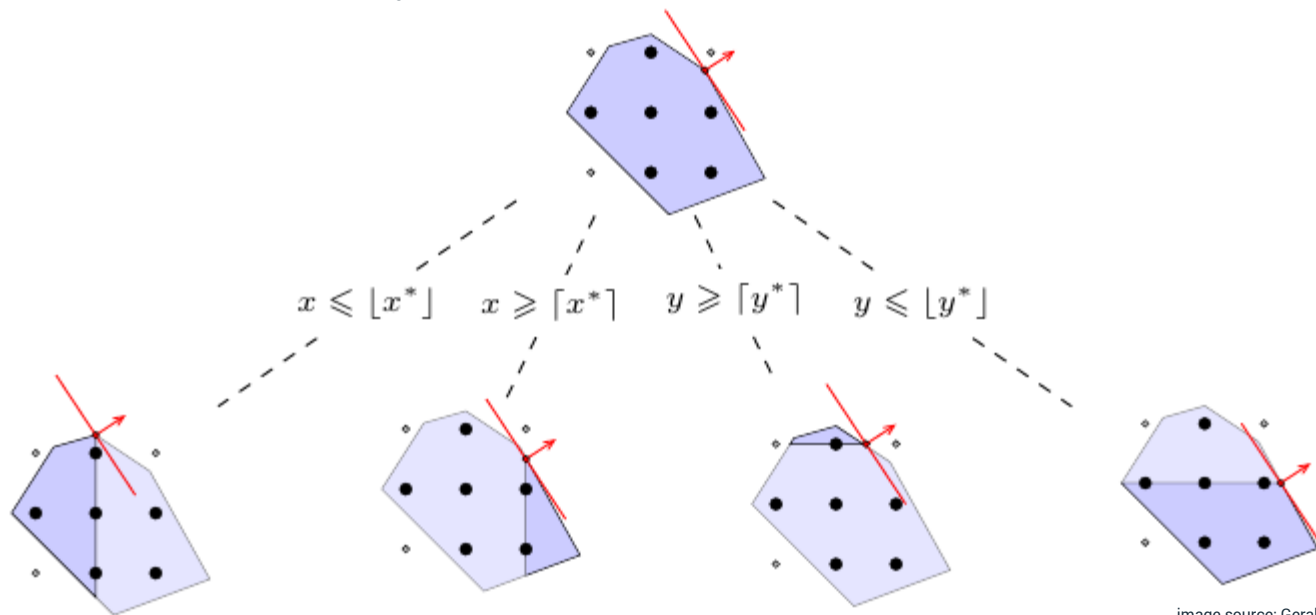


image source: Gerald Gamrath

Strong Branching (Applegate et al 1995)

- Effective w.r.t. number of nodes, expensive w.r.t. time
- Positive side effects. Strong branching might:
 - Change variable bound, when one side is infeasible
 - Detect local infeasibility, when both sides are infeasible
 - Find feasible solutions

Speeding strong branching up:

- Only for some candidates, stop if you do not make enough improvement
- Limit number of simplex iterations
- Special case: One iteration → Driebeek penalties (Driebeek 1966)
 - Can be efficiently computed by ratio test

Strong Branching + Domain Propagation (Gamrath 2014)

- Some strong branching LPs further restricted by domain propagation
 - Add branching bound $\rightarrow$ perform “default” domain propagation $\rightarrow$ solve LP
- Better predictions, [more fixings](#)
- Important special case: probing
 - Only domain propagation, no LP

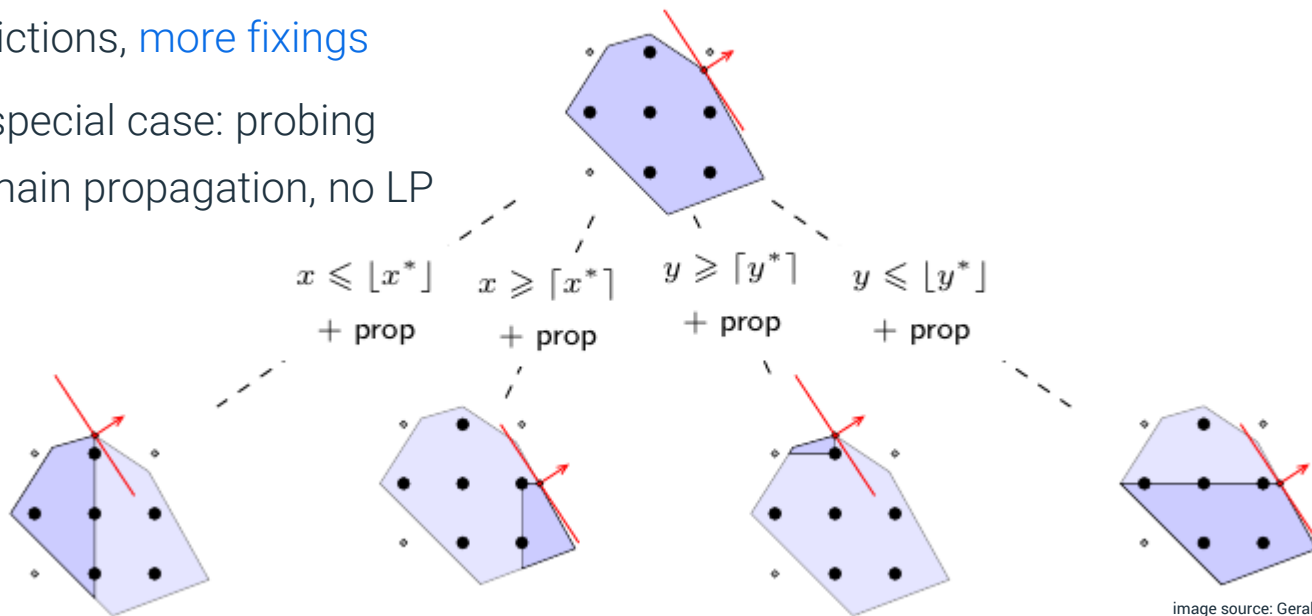


image source: Gerald Gamrath

Pseudo-Costs (Bénichou 1971)

- Strong branching: A-priori observation, pseudo-costs: a-posteriori
- Estimate for objective gain based on past branching observations
- **Objective gain per unit fractionality**: computed from fractionalities $f_j^-, f_j^+ := 1 - f_j^-$ and differences $\Delta^\downarrow, \Delta^\uparrow$ in LP values



- downward obj. gain for var. j at current node: $\varphi_j^- = \frac{\Delta^\downarrow}{f_j^-}$

- upward obj. gain for var. j at current node: $\varphi_j^+ = \frac{\Delta^\uparrow}{f_j^+}$

- **Pseudo-costs** Ψ_j^-, Ψ_j^+ : average unit gain taken over all nodes that branched on same variable

- downward pseudo-cost: $\Psi_j^- = \frac{\varphi_{j,1}^- + \dots + \varphi_{j,k}^-}{k}$

- upward pseudo-cost: $\Psi_j^+ = \frac{\varphi_{j,1}^+ + \dots + \varphi_{j,k}^+}{k}$

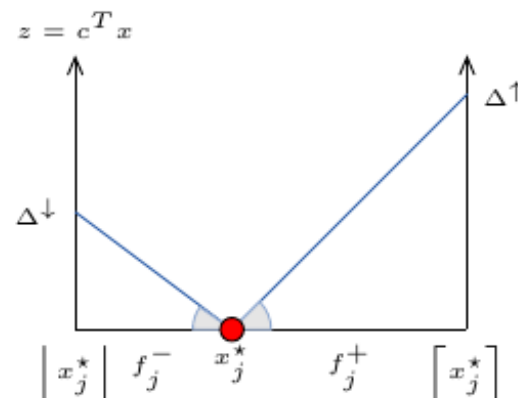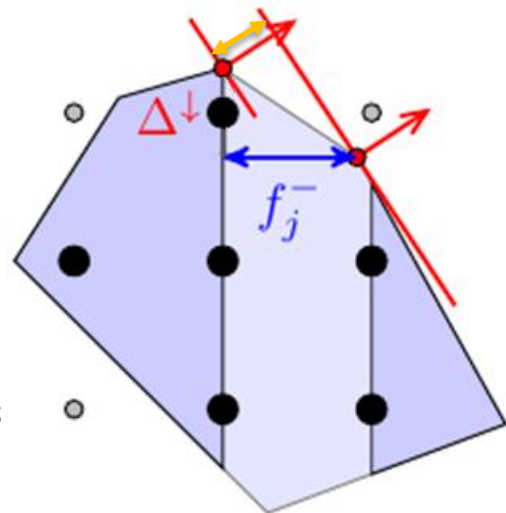

Pseudo-Cost Branching


- Estimated increase of objective $\Delta_j^- = f_j^- \Psi_j^-$, $\Delta_j^+ = f_j^+ \Psi_j^+$ based on current fractionalities f_j^-, f_j^+
- Core of most state-of-the-art branching schemes
- Gets better and better during the search

Pro:

- Very cheap to compute

Cons:

- Values might show a large variance
- Attributes all change to the last branching

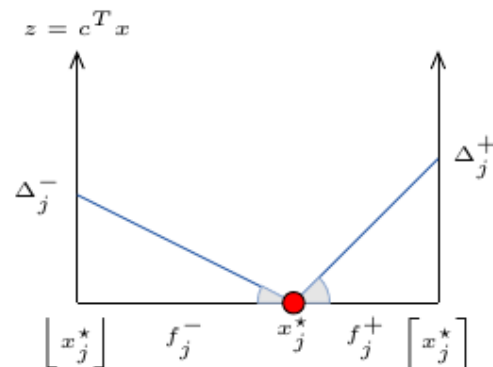

Branching Scores: Two become one

- Most branching rules yield two values: One for down-, one for up-branch
- Need to combine them to a **single value** to compare them
- First idea: average
- Slightly more involved: convex sum
 - $\text{score}(x_j^-) = \lambda \max\{s_j^-, s_j^+\} + (1 - \lambda) \min\{s_j^-, s_j^+\}$
 - includes minimum and maximum as extreme cases
- Better: **multiplication**
 - $\text{score}(x_j^-) = \max\{s_j^-, s_j^+\} \cdot \min\{s_j^-, s_j^+\}$
 - computational results: 10% faster
 - Balances the tree
 - Foreshadowing for Thursday: Geometric means are good!

Reliability Branching (Achterberg et al 2005)

- Pseudo-cost branching gets better and better during the search
 - Most important branchings are made in the beginning
- Standard approach: Pseudo-cost branching with strong branching initialization
- Even better: consider variable **unreliable**, as long as there are **fewer than k** strong branches
 - Typical values for k: 4-8
 - k might depend on **variance** of pseudo-cost values

y : ○ ○|○○ (10 obs)

x : ○ ○ ○ ○○ | ○○○○ ○ ○ ○ (16 obs)

Quiz Time

- Pseudo-costs are an
 - a) Underestimator of the objective change when branching
 - b) Overestimator of the objective change when branching
 - c) Heuristic estimate of the objective change when branching
- Strong Branching is very competitive w.r.t. the
 - a) Running time
 - b) Number of nodes
 - c) Primal-dual integral
- A main drawback of pseudo-costs is that
 - a) They are uninitialized when the most important branchings are taken
 - b) They are expensive to compute
 - c) They become less reliable over time



Quiz Time

- Pseudo-costs are an
 - a) Underestimator of the objective change when branching
 - b) Overestimator of the objective change when branching
 - c) **Heuristic estimate of the objective change when branching**
- Strong Branching is very competitive w.r.t. the
 - a) Running time
 - b) Number of nodes
 - c) Primal-dual integral
- A main drawback of pseudo-costs is that
 - a) They are uninitialized when the most important branchings are taken
 - b) They are expensive to compute
 - c) They become less reliable over time



Quiz Time

- Pseudo-costs are an
 - a) Underestimator of the objective change when branching
 - b) Overestimator of the objective change when branching
 - c) **Heuristic estimate of the objective change when branching**
- Strong Branching is very competitive w.r.t. the
 - a) Running time
 - b) **Number of nodes**
 - c) Primal-dual integral
- A main drawback of pseudo-costs is that
 - a) They are uninitialized when the most important branchings are taken
 - b) They are expensive to compute
 - c) They become less reliable over time



Quiz Time

- Pseudo-costs are an
 - a) Underestimator of the objective change when branching
 - b) Overestimator of the objective change when branching
 - c) **Heuristic estimate of the objective change when branching**
- Strong Branching is very competitive w.r.t. the
 - a) Running time
 - b) **Number of nodes**
 - c) Primal-dual integral
- A main drawback of pseudo-costs is that
 - a) **They are uninitialized when the most important branchings are taken**
 - b) They are expensive to compute
 - c) They become less reliable over time



Finally, All Good Now?




What If Pseudo-Costs Don't Work?

- Many situations where pseudocosts might not work well:
 - No objective → pseudo-costs all zero
 - Solution symmetries: Solution is “pushed around” → objective gains almost always zero
 - High dual degeneracy → objective gains often zero
 - Even if none of the above applies, we might need a tie-breaker!



- Some (cheap) local rules might still work well: probing
- What other useful statistics can we collect about variables?




Hybrid Branching and Other History Rules

Inference Branching

- Inference branching:

- Average number of implied bound reductions
- History based
- Captures combinatorial structure
- Estimates tightening of subproblems


$$\begin{aligned} x_1 + x_2 &= 1 \\ x_1 + x_3 + x_4 &\leq 1 \\ x_1 + z &\geq 3 \\ z &\in \mathbb{Z}_+ \\ x_i &\in \{0, 1\} \end{aligned}$$



$$\begin{aligned} x_1 = 0 &\Rightarrow x_2 = 1 \\ &\Rightarrow z \geq 3 \end{aligned}$$

$$s_j^{\text{infer}}(-) = 2$$

- Analogy to pseudo-cost values in MIP
- One value for upwards branch, one for downwards
- Initialization: probing ($\approx$ strong branching)




$$\begin{aligned} x_1 = 1 &\Rightarrow x_2 = 0 \\ &\Rightarrow x_3 = 0 \\ &\Rightarrow x_4 = 0 \end{aligned}$$

$$s_j^{\text{infer}}(+) = 3$$

VSIDS Branching (Moskewicz et al 2001)

Conflict analysis:

- Learn additional constraints which trigger infeasibility
- Important for feasibility problems

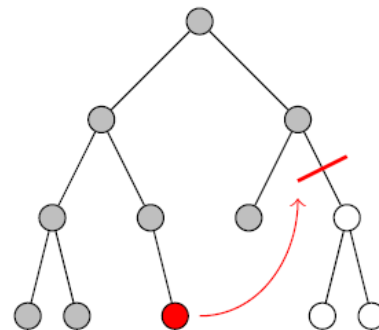


VSIDS branching:

- Variable which appears in the largest number of (conflict) clauses
 - Branch towards infeasibility
- Prefer “recent” conflicts: exponentially decreasing importance
- Works particularly well for feasibility problems
- Still at the core of modern SAT solvers


Branching Scores Based on Intersection Cuts (Turner et al. 2023)

- Observation:
 - Gomory Mixed Integer (GMI) cuts can be interpreted as split cuts derived from branching on a basic variable
- Idea:
 - Deep cuts might correspond to important branchings
 - Favor branching variables associated with “strong” GMI cuts
 - Cut Distance score:

$$CD(x_j) := \text{Depth of the intersection cut from the tableau row of } x_j$$

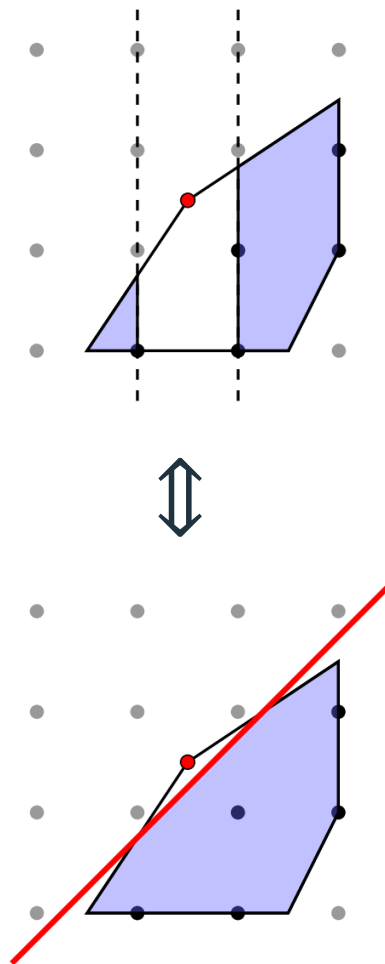

Hybrid Branching (Achterberg and Berthold 2009)

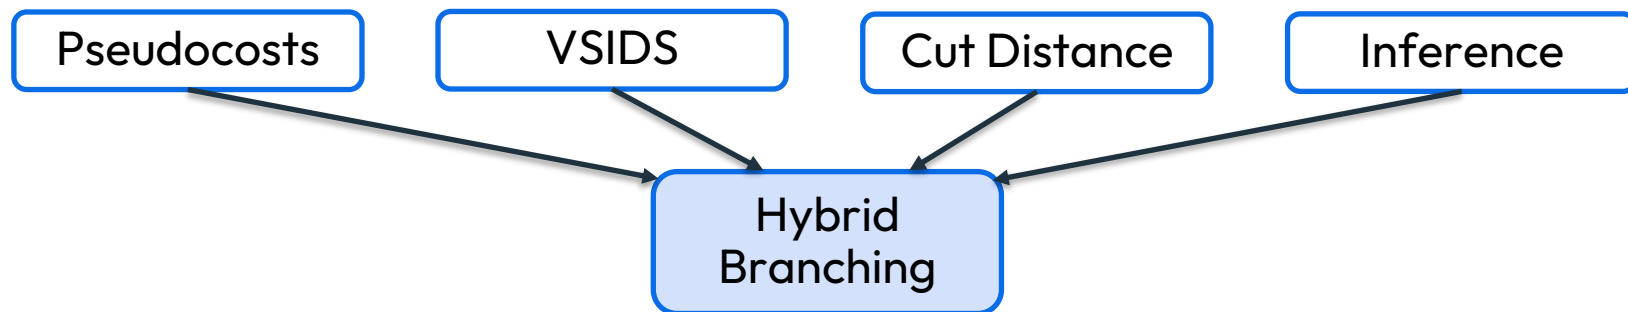



- Additional tie-breakers: number of pruned subproblems, variable counts in Farkas proofs, ...
- Scaling: divide each value by average over all variables
- Use a [weighted sum](#) of all criteria
- Or: Use a [leveled filtering](#) approach. First filter leaves 50% candidates, second filter 10%,...

Branching on General Disjunctions

$$\pi^T x \leq \pi_0 \quad \vee \quad \pi^T x \geq \pi_0 + 1$$

with $(\pi, \pi_0) \in \mathbb{Z}^n \times \mathbb{Z}$, and $\pi_i = 0$ for all $i \notin \mathcal{I}$.

- potentially better branching decisions
 - but matrix size increases instead of decreases
- choosing the best candidate computationally much more expensive
- no generic scheme improving the overall MIP performance
 - Xpress branches on general disjunctions in some cases



Branching on Multi-Aggregated Variables (Gamrath et al 2015)

- Some variables get **multi-aggregated** in presolving $x_j = \beta + \sum_{j \in \mathcal{S}} \alpha_j x_j$
- multi-aggregated variables **not part of presolved problem**
 - not used as branching candidates
- branch on **corresponding general disjunctions**
 - extend variable-based branching by these disjunctions

$$\sum_{j \in \mathcal{S}} \alpha_j x_j \geq \left\lfloor \sum_{j \in \mathcal{S}} \alpha_j \tilde{x}_j \right\rfloor \quad \vee \quad \sum_{j \in \mathcal{S}} \alpha_j x_j \leq \left\lceil \sum_{j \in \mathcal{S}} \alpha_j \tilde{x}_j \right\rceil$$

- represents **decisions in original problem**
- moderately enlarged candidate set

Quiz Time

- Strong Branching + Pseudocost Branching =
 - a) Hybrid Branching
 - b) Reliability Branching
 - c) Inference Branching
- Which of the following are history-based branching scores?
 - a) VSIDS
 - b) Inference Scores
 - c) Probing



Quiz Time

- Strong Branching + Pseudocost Branching =
 - a) Hybrid Branching
 - b) Reliability Branching**
 - c) Inference Branching
- Which of the following are history-based branching scores?
 - a) VSIDS
 - b) Inference Scores
 - c) Probing



Quiz Time

- Strong Branching + Pseudocost Branching =
 - a) Hybrid Branching
 - b) **Reliability Branching**
 - c) Inference Branching
- Which of the following are history-based branching scores?
 - a) **VSIDS**
 - b) **Inference Scores**
 - c) Probing






Node Selection

Considerations

Goals:

- Improve primal bound to enable pruning
- Improve global dual bound
- Keep computational effort small
 - Prefer children over siblings over others
- Ramp-up:
 - Diversification
 - For parallelization

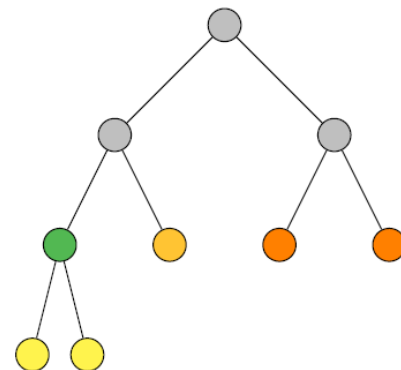


Node Selection Rules

Basic rules

- Depth first search (DFS) → early feasible solutions
 - Most of the time, MIP solvers do DFS
- Breadth first search (BFS) → diversification, ramp-up
- Best bound search (BBS) → improve dual bound
- Best estimate search (BES) → improve primal bound

Combinations:

- BBS or BES with plunging
- Hybrid BES/BBS / Interleaved BES/BBS

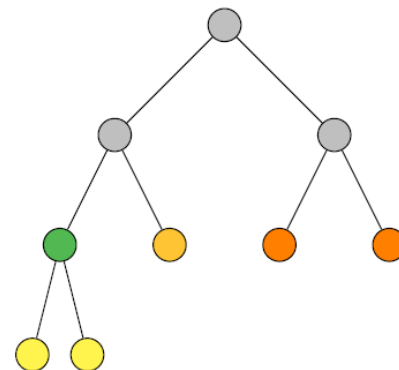

What Do Typical Branching Trees Look Like?

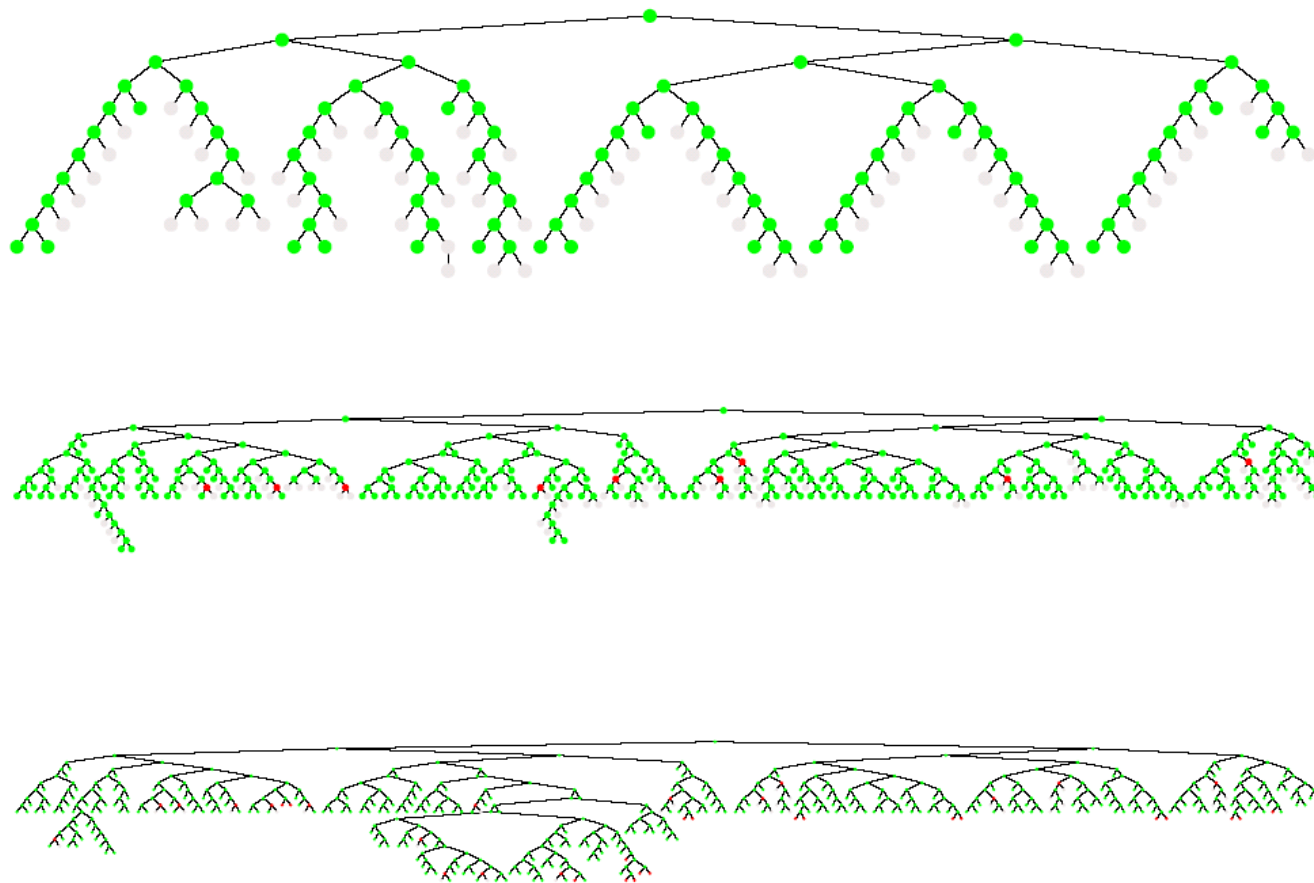


image source: Thorsten Koch

What Do Typical Branching Trees Look Like?

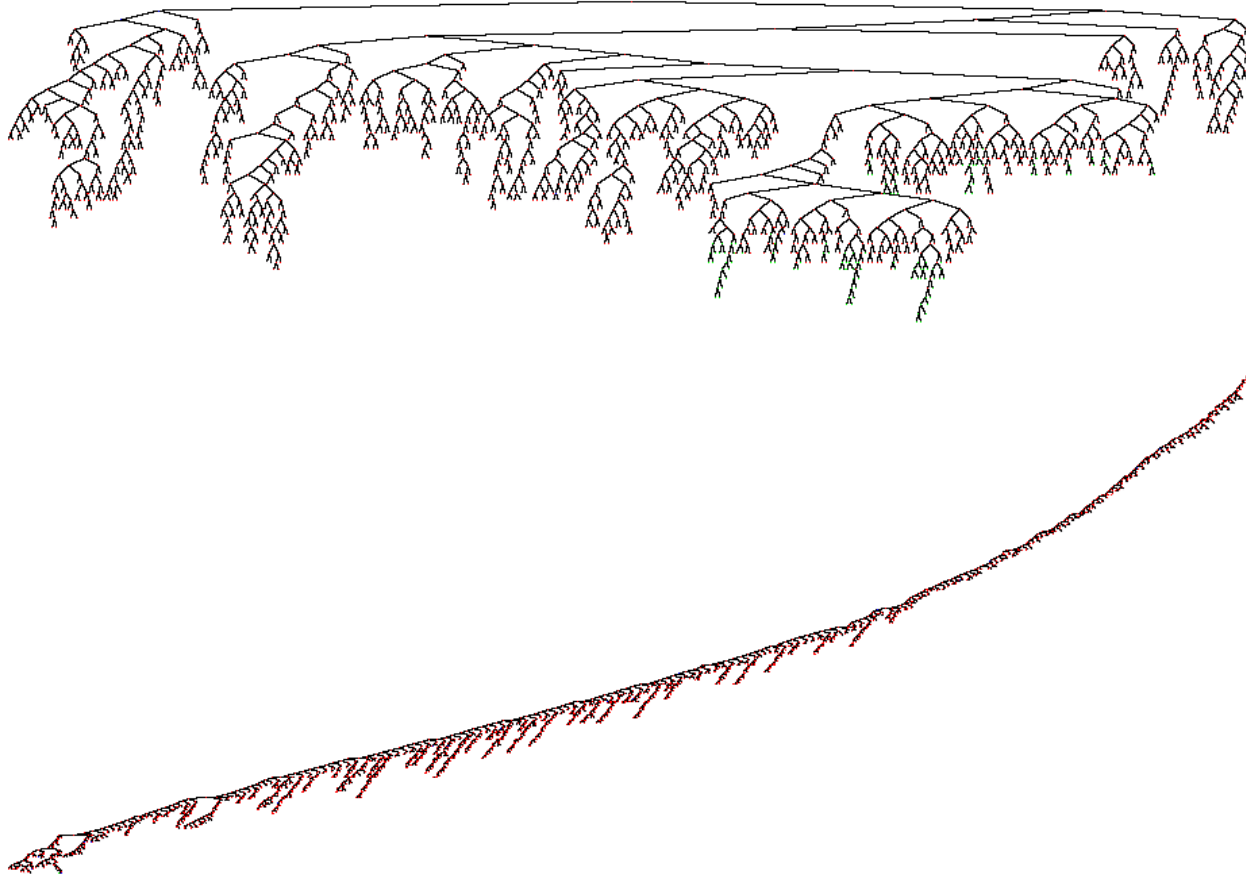


image source: Thorsten Koch

Quiz Time

- Most of the time, a MIP solver will select as next node
 - a) A child or sibling of the current node
 - b) A node close to the root
 - c) A node with the best dual bound
- W.r.t. running time, node selection empirically has
 - a) A larger impact than the branching rule
 - b) A smaller impact than the branching rule
 - c) About the same impact as the branching rule



Quiz Time

- Most of the time, a MIP solver will select as next node
 - a) **A child or sibling of the current node**
 - b) A node close to the root
 - c) A node with the best dual bound
- W.r.t. running time, node selection empirically has
 - a) A larger impact than the branching rule
 - b) A smaller impact than the branching rule
 - c) About the same impact as the branching rule



Quiz Time

- Most of the time, a MIP solver will select as next node
 - a) **A child or sibling of the current node**
 - b) A node close to the root
 - c) A node with the best dual bound
- W.r.t. running time, node selection empirically has
 - a) A larger impact than the branching rule
 - b) **A smaller impact than the branching rule**
 - c) About the same impact as the branching rule



Thank You!

PD Dr. Timo Berthold

Private Lecturer @ TU Berlin

Director, Mixed-Integer Optimization @ FICO